



Mounting Pole & Base

EN Installation & Setup Guide

v2025-06-23

37858



Table of Contents

Table of Contents	2
Contents	3
Mounting points	4
Installation: Mounting base & Mounting Pole	5
Mounting the charger(s)	6
Mounting accessories	7




Contents

#1:
1x Mounting
Pole



#2:
Bolt (Hex)
M3x16




#3:
Bolt (Hex)
M4x12



#4:
Bolt (Hex)
M5x20




#5:
Bolt (Hex)
M6x20




#6:
Plug
M3



#7:
Plug
M4



#8:
Plug
M5




#9:
Slot Plug
50x30





Mounting points

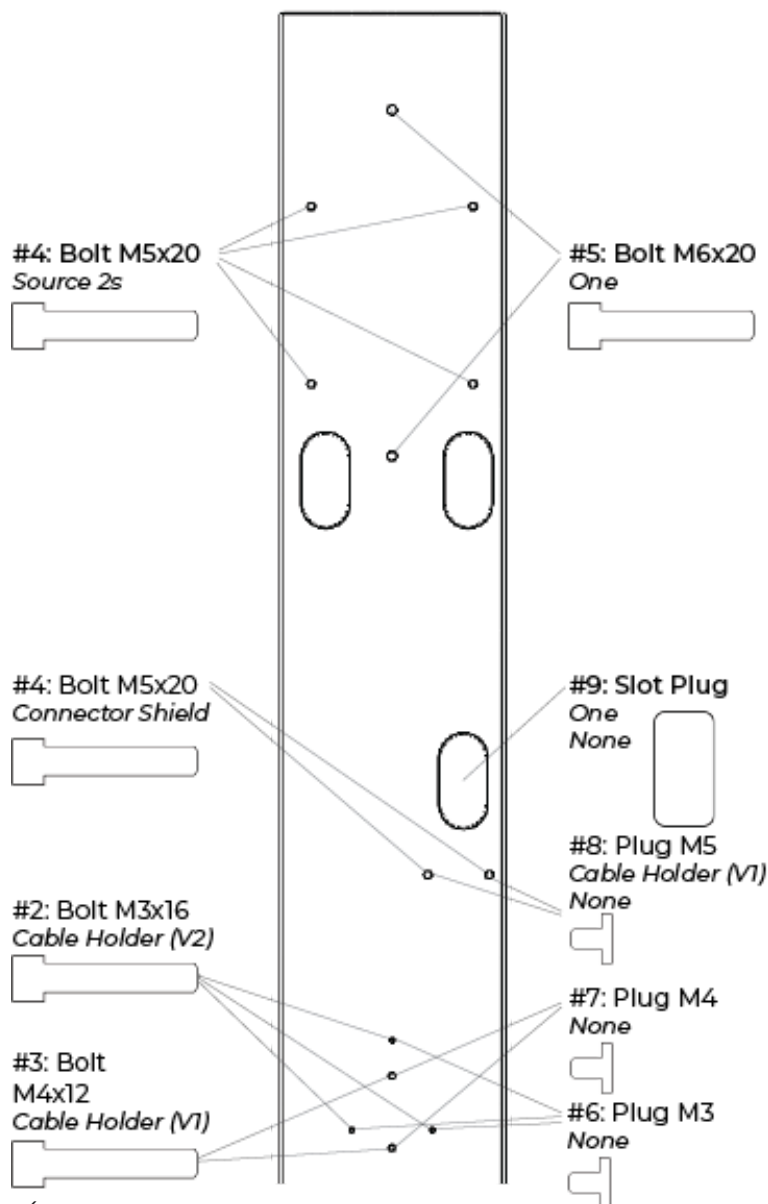




Installation: Mounting base & Mounting Pole


In case the (#1) Mounting Pole ("Pole") can't be mounted directly on a strong, hard surface, you use our Mounting Base ("Base"). If you're not using Volt Time's Base, follow only step 4.

1. Dig a hole equal to at least the base dimensions +5cm. Make sure the bottom of the hole is level. **Check for version A/B.**
2. Assemble the Base according to the diagram below.
3. Lower the assembled Base into the hole, while feeding through any cabling.
4. Mount the Pole onto the Base while feeding through any cables through the Pole's slotted hole, fasten with M12 bolts.
5. Add quick-setting cement to the hole, let it fill about 50% of the hole. Fill the other 50% with water.
6. Once the cement starts hardening, level the mounting pole.

Version A: 400x200x400mm

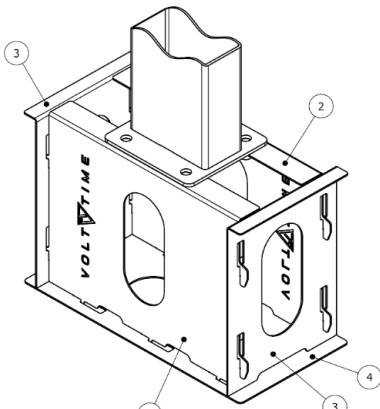

Version B: 582x250x200mm

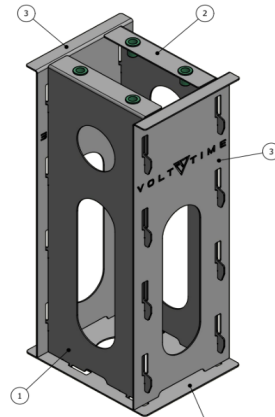



Mounting the charger(s)

Volt Time | Source 2s:

1. Use (**#4**) M5x20 bolts to mount the mounting plate(s) of the charger(s).
2. When using the rear-side entry, strip, feed through and connect all wires first.
3. Mount and wire the charger according to the Source 2s Installation Guide provided with the charger.

Volt Time | One:

1. If using the rear-side entry, strip, feed through and connect all wires first.
2. Screw the (**#5**) M6x20 Bolt in the topmost hole and leave 5mm of space between the bottom of the head and the Pole.
3. Hang the Charger Unit around the bolt. Fasten the second (**#5**) M6x20 bolt.
4. Wire and close the charger according to the One Installation Guide provided with the charger.



Warning: You are responsible for installing electrical equipment on these products according to the local rules and regulations, including but not limited to earthing the mounting pole itself. Read the manuals of the chargers themselves and take into consideration any and all safety precautions.



Mounting accessories

For hole locations, refer to page 4.

Cable Holder (FP-AC-HLD-2 / 9505748557645)

When not using this accessory, place 3x (#6) Plug M3.


1. Use 3x (#2) Bolt M3x16 to screw the cable holder's body in place.
2. Snap the cable holder's front cover in place.
3. Secure the cable holder's front cover using the two tiny plastic screws included in its packaging.



Connector Shield (FP-AC-SHLD-CL-9005 / 9504761792934)

When not using this accessory, place 2x (#8) Plug M5 and 1x (#9) Slot Plug.

1. Connect all wires to the Source 2s charger.
2. Use 2x (#4) Bolt M5x20 to fasten the Connector Shield.



Alternate Cable Holder (FP-AC-HLD / 9506892331792)

When not using this accessory, place 2x (#7) Plug M4.

1. Place 3x (#6) Plug M3 to cover up the three triangularly distanced holes of the different model cable holder.
2. Use 2x (#3) Bolt M3x12 to screw the cable holder's rails onto the Pole. Pay attention to the orientation of the hooks.
3. Snap the Cable Holder in place over the rails.



Installer App



User App



For help, visit **support.volttime.com**

VOLT  TIME

De Entree 99 - 1101 HE Amsterdam, Netherlands
www.volttime.com

June 2025 - v2025-06-23

Copyright 2025 Volt Time B.V.
Volt Time® is a Registered Trademark.



37858