


 Nederlandse versie / Dutch version:



volttime.com/downloads/mountingpole/adapter

Important information

Read this document first before starting your installation.

This Adapter must only be used for fitting the following products together:


- **FP-AC-MOPO-S-RVS-2025** : Mounting Pole (RVS) (2025) (single)
 - Which has a footplate with 120x110mm holes.
- **FP-AC-MOBA-M** : Mounting Base
 - Which has a footplate with 110x110mm holes.

This Adapter makes it possible to install these two products despite the different footplate hole dimensions.

Contents


#1:

1x Adapter
MOBA-M w/
MOPO-S-2025-
RVS 110x120




#2:

4x Bolt (Hex)
M12x30



#3:

4x Ring M12



Read other side for instructions.

Instructions


Step 1: Check which mounting base (**FP-AC-MOBA-M**) you have. Read the manual supplied with the mounting base.

Step 2: If you have version A, you must dig a hole of at least 488mm deep to fit the mounting base.


If you have version B, you must dig a hole of at least 620mm deep.

Step 3: Continue with steps 2 & 3 of the mounting base manual.

Step 4: Fit the adapter (**FP-AC-MOBA-M-ADAP-110x120**) onto the mounting base (**FP-AC-MOBA-M**). Use the M12 rings and M12x50 bolts supplied in the packaging of the mounting base.

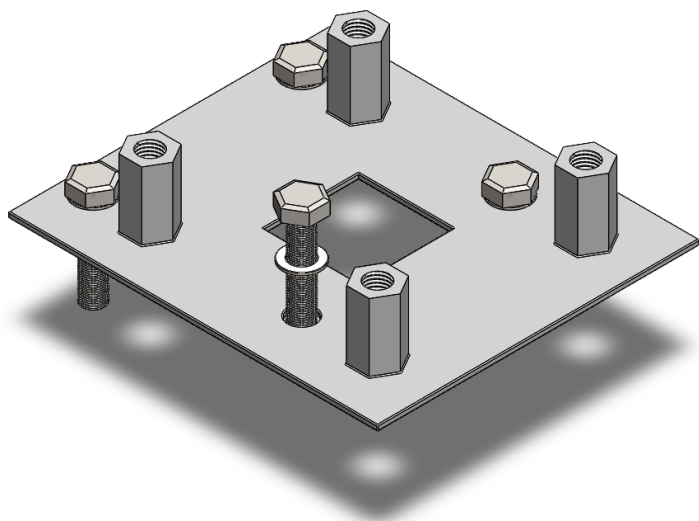

Step 5: Fit the mounting pole (**FP-AC-MOPO-S-RVS-2025**) onto the adapter. Use the rings (#3) and bolts (#2) supplied with this adapter package.

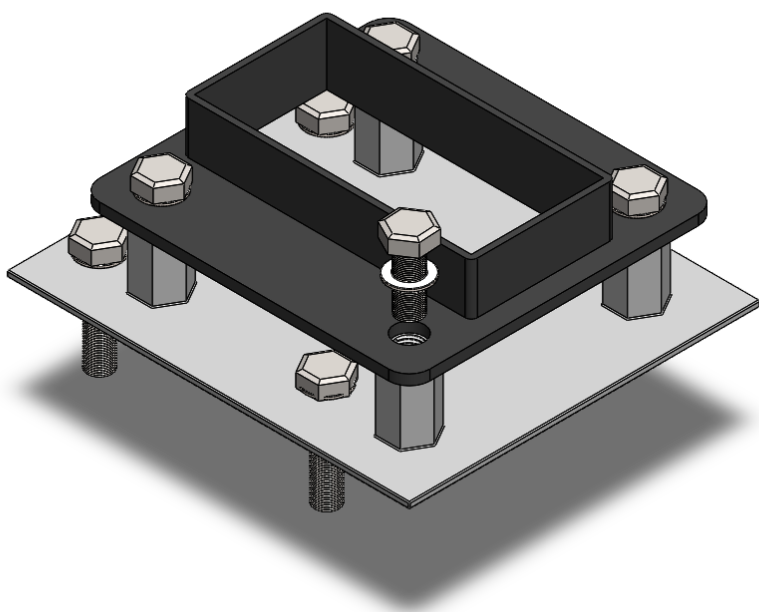

Step 6: Continue with step 4 from the mounting base manual.

VOLT TIME

De Entree 99 - 1101 HE Amsterdam, Netherlands
www.volttime.com

October 2025 - v2025-10-29

Copyright 2025 Volt Time B.V.
Volt Time® is a Registered Trademark.